







Design Access Control

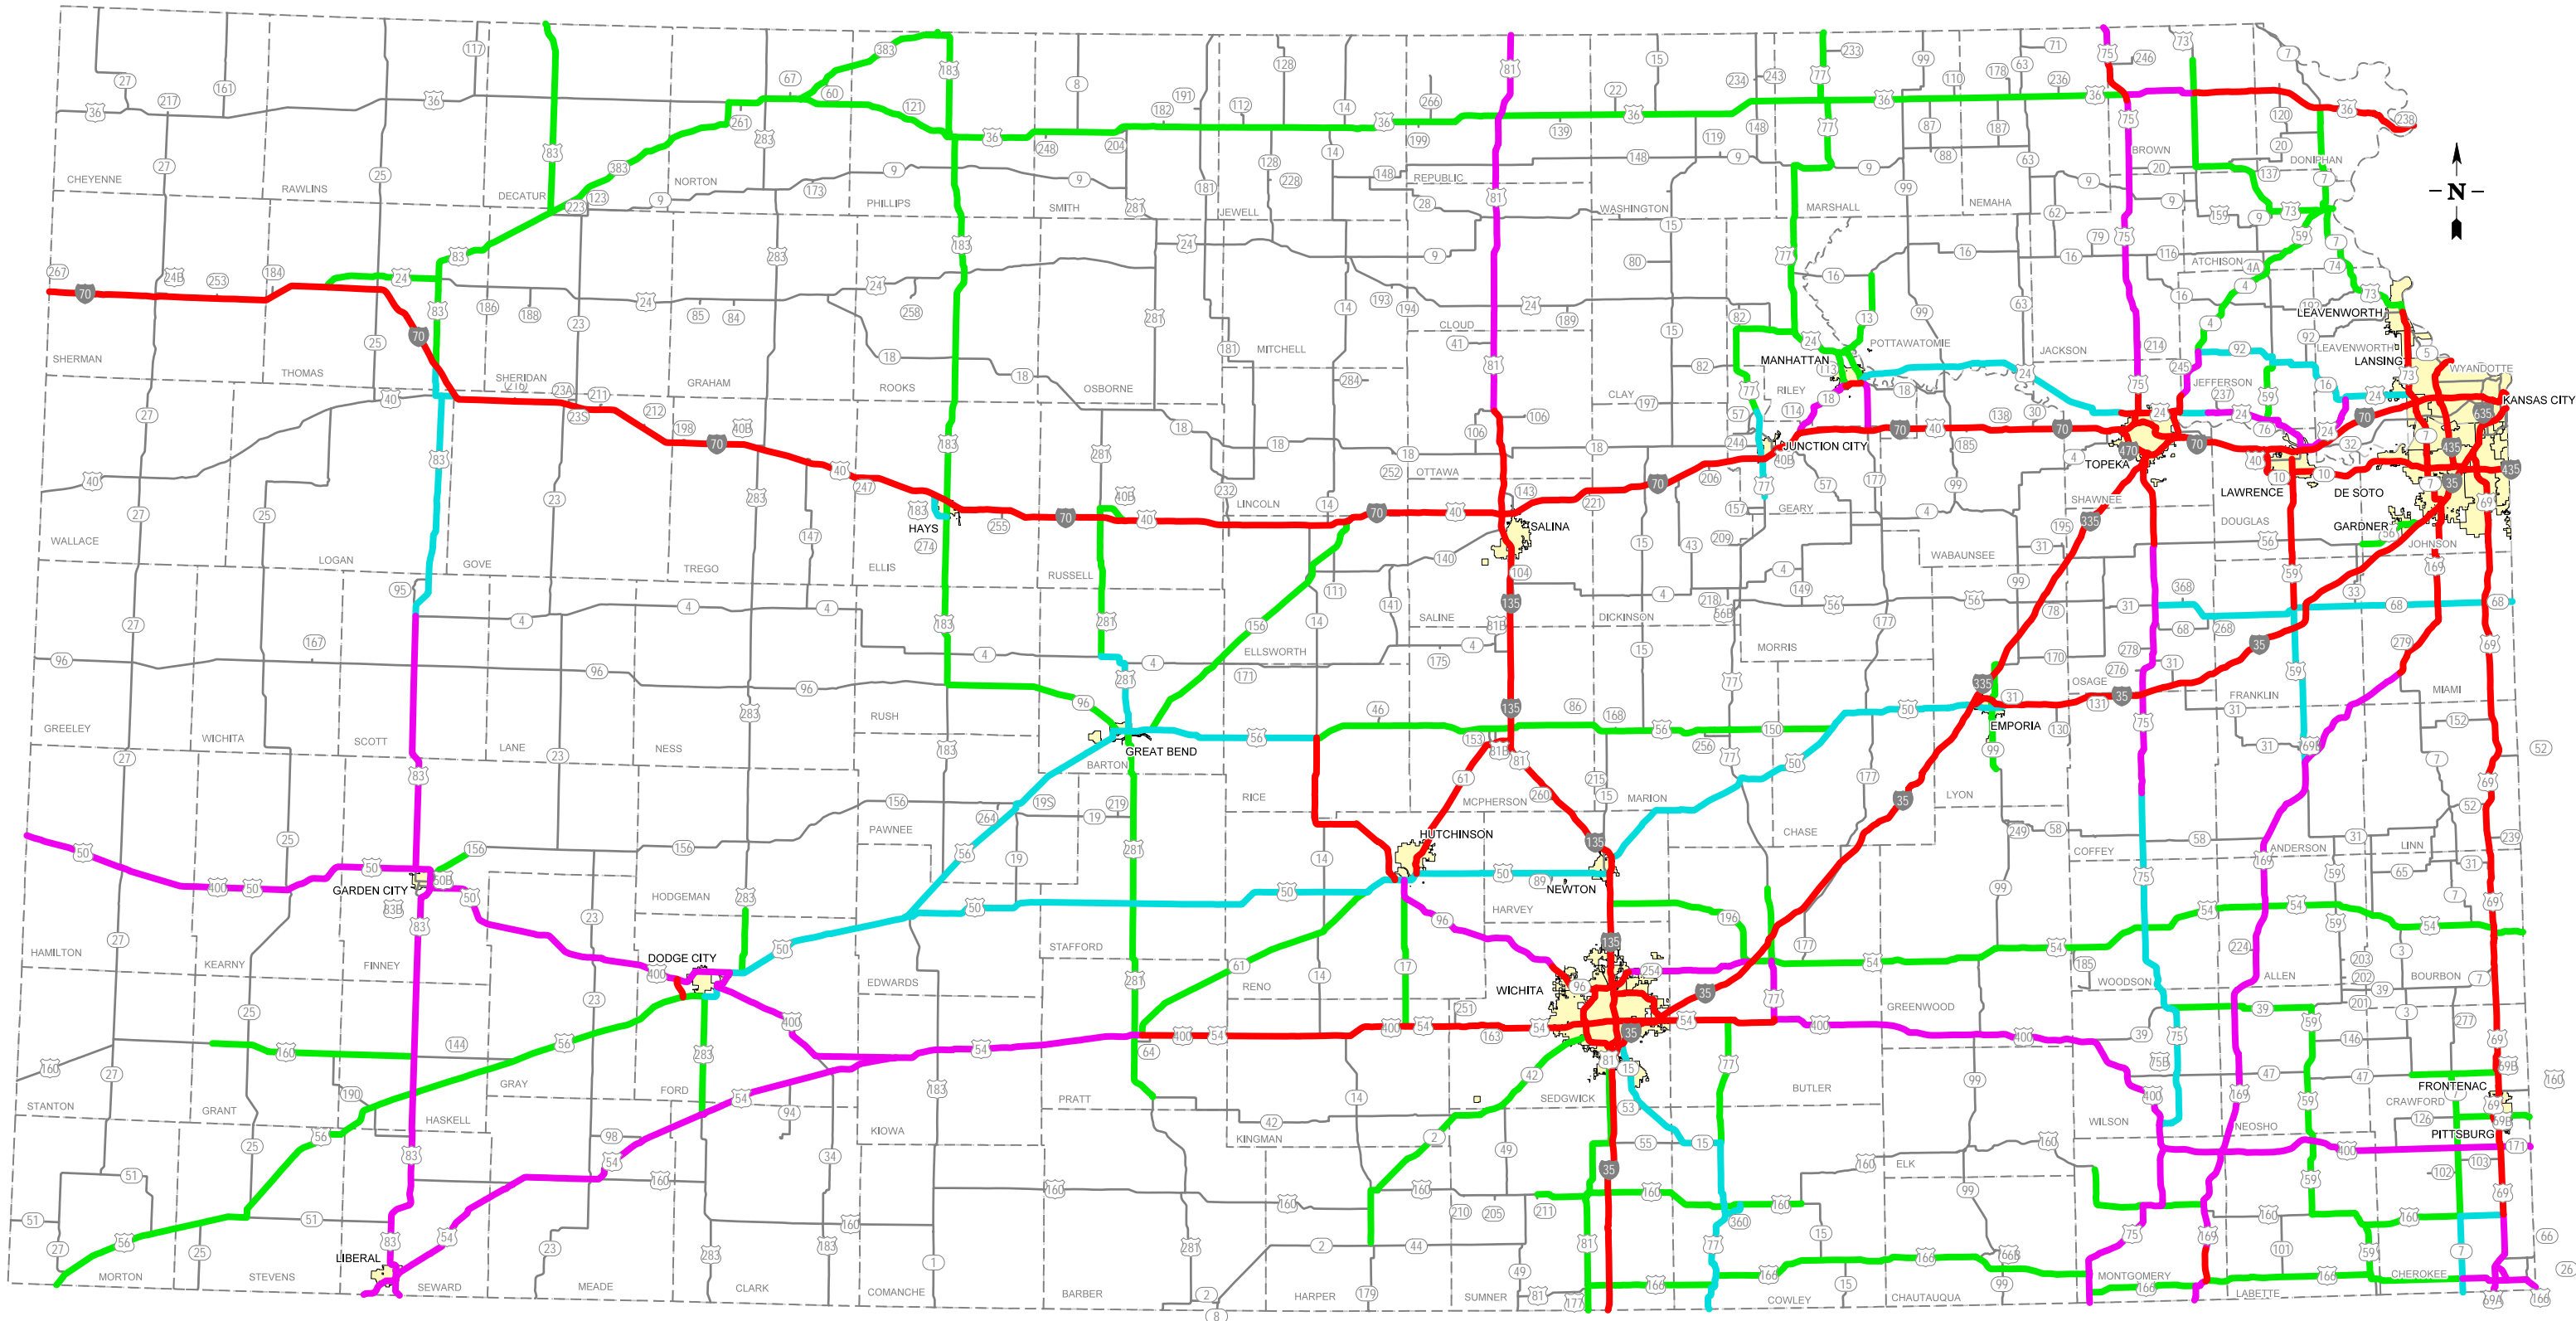

Note: New bypasses should have full access control.

Note: Approaches to freeways and to cities with populations greater than or equal to 4000 should have as a minimum, Low Order partial access control extending approximately 1 mile or, more desirably, Moderate Order partial access control for 2 miles.

- | | | | |
|---|--------------------|---|------------------------|
|  | Full |  | Moderate Order Partial |
|  | High Order Partial |  | Low Order Partial |
|  | None | | |



Map Date: July 13, 2011
 CANSYS Data July 2011
 Prepared by the
 Kansas Department of Transportation
 Bureau of Transportation Planning
 Topeka, KS